


APD 1915 M

Mitsubishi
Stamford
D+&



ISO8528

GC,)&-

CE

2000/14/EC

&\$\$\$/ (#

z) \$ z'z' D:

	"	"	"	"	Amp
400/230	1915,00	1532,00	1740,00	1392,00	2511,00

FDGDE

GC,)&

) & z

DFDE

%\$1

% %&

GC" \$(*"

z&(

GC

Standard Specifications

ALTERNATOR

TRANSFER SWITCH

APD 1915 M

Mitsubishi
Stamford
D+' &'



Manufacturer		Mitsubishi		
Model		S16R-PTA		
		% \$ \$	"# "	
		% - \$	"	
		0% \$ < DQ		
	L	65,37		
	"	170 X 180		
		14:1		
	fl # 7	"# "	1500	
	fl 7	L	230,00	
		L	350,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	128,00		
	' # "	1950		
	' # "	339,00		
		24 V d.c.		
	Load	% \$ \$	'+) i) \$
	# "			
		357,00	270,00	181,00

		Stamford		
		PI 734E		
	Hz	50		
	"	1900		
7cg		0,80		
		3		
	fl 7	400/230		
	A	2742		


		fl 7		fl 7	
	"	"	"	"	L
APD 1915 M	13850	5160	2250	2550	2000
		fl 7		fl 7	
	"	"	"	"	L
AK 99		9000	2800	4800	2000

APD 1915 M

Mitsubishi
Stamford
D+' &'



1 D+' &'

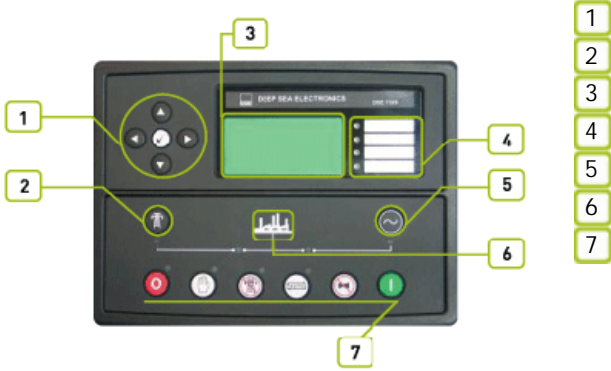

2

"8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

'8G9+' &\$ž &)' \$' žž

"'8G9+' &\$ž '8G9+' &\$ž

% &1 '*(' žFG&' &žFG(,) ž

APD 1915 M

Mitsubishi
Stamford
D+' &''



f@#@Bl
f@#@!@ t
" " " " " " " "
" " " " " " " "
f@#@Bl

971

f&) (, t
f&%) +t
f&% \$t

6G'9B '* \$-) \$
6G'9B '* % \$\$\$! * ! &
6G'9B '* % \$\$\$! * ! (

GA 8
) ž ž ž ž
& (\$) ž ž ž ž
' & (" ž

APD 1915 M

Mitsubishi
Stamford
D+' &



5? -- !

f! \$ \$! % % \$ \$ E

ž

ž

"

"

ž

ž

ž

ž

ž

& \$\$\$ # % (# "

	"	2800
f! "E	"	9000
f! "E	"	4800
		2000