

APD 30 C

Cummins
Akso
D+&



z) \$ z'z' D:

	"	"	"	"	Amp
400/230	30,00	24,00	27,00	21,60	38,00

Standard Specifications

1

ALTERNATOR

TRANSFER SWITCH

APD 30 C

Cummins
Aksa
D+&



Manufacturer		Cummins
Model		4B3,9-G2
		%\$\$ "# "
		&* "0) < DQ
	L	3,90
	"	102 x 120
		16,5:1
	fl # ı	"# " 1500
	fl ı	L 11,00
	L	19,00
AbsorbedAirDischargeReSourceKey.Text	' # "	1,97
	' # "	120
fl ' # ı	' # "	4,05
		24 V d.c.
	Load	%\$\$ı
	# "	
		6,70

		Aksa
		AK22
	Hz	50
	"	28
7cg		0,80
		3
	fl ı	400/230
	A	39


		fl ı		fl ı	
	"	"	"	"	L
APD 30 C	820	1860	900	1400	145
		fl ı		fl ı	
	"	"	"	"	L
APD 30 C	1200	2500	970	1600	

APD 30 C

Cummins
Aksa D+&''



1 D'+&''

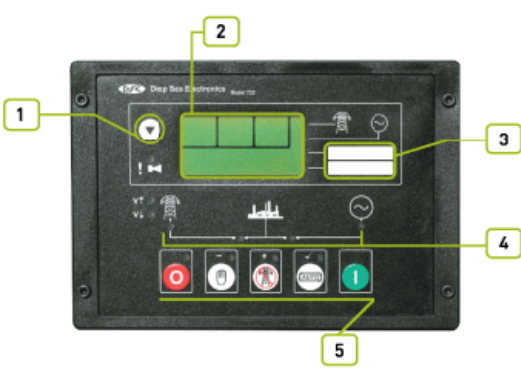

- 1
- 2
- 3
- 4
- 5

2

8G9ž +&\$ž) 5ž&&\$#(\$

3

4

5

8G9'+&\$ 8G9'+&\$ ž fl

8G9'+&\$ ž fl

fl ž fl %\$\$

ž ž ž ž

APD 30 C

Cummins
Aksa
D+&



f@Bt
f@%&@t
f@z@Bt

#

#

6G'9B *\$-\$) \$
6G'9B *%\$\$!*&
6G'9B *%\$\$!*(

GA 8

%, !&* \$

%&\$)

ž

ž

!%&

"

ž

ž

"

APD 30 C

Cummins
Aksa
D+&T



5D8" \$7 !

1

f) !&+)

7

ž

ž

5

ž

ž

ž

ž

	"	970
f) 7	"	2500
f) 7	"	1600