

# APD 43 C

Cummins  
Aksa  
D+&T



z) \$ z`z\$`D:

	"	"	"	"	Amp
400/230	43,00	34,40	39,00	31,20	56,00

## Standard Specifications

### ALTERNATOR

### TRANSFER SWITCH

# APD 43 C

Cummins  
Aksa  
D+&



Manufacturer		Cummins
Model		4BT3,9-G2
		%\$ \$ "# "
		( \$ "Q (<DQ
	L	3,90
	"	102 x 120
		16,5:1
	fl # ı	"# " 1500
	fl ı	L 11,00
	L	19,00
AbsorbedAirDischargeReSourceKey.Text	' # "	2,60
	' # "	120
	' # "	6,06
		24 V d.c.
	Load	%\$ \$ı
	# "	9,30

		Aksa
		AK232
	Hz	50
	"	40
7cg'		0,80
		3
	fl ı	400/230
	A	58


		fl ı		fl ı	
	"	"	"	"	L
APD 43 C	860	1860	900	1400	145
		fl ı		fl ı	
	"	"	"	"	L
APD 43 C	1240	2500	970	1600	

# APD 43 C

Cummins  
Aksa D+&''



1 D'+&''

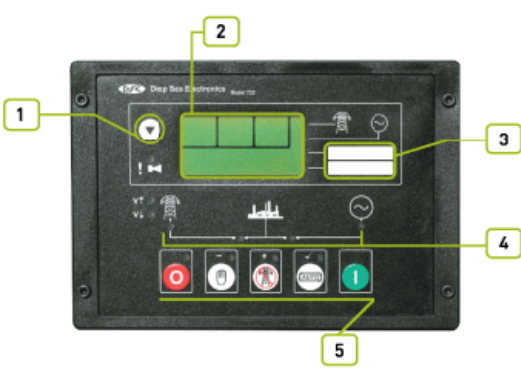

- 1
- 2
- 3
- 4
- 5

2

8G9ž +&\$ž ) 5ž&&\$#(\$

3

4

5

8G9'+&\$ 8G9'+&\$ fl  
 &)' \$ ž  
 8G9'+ &\$ ž  
 fl ž fl %\$\$  
 ž  
 # ž ž ž ž

# APD 43 C

Cummins  
Aksa  
D+&''



f@Bt  
f@%&@t  
f@z@Bt

#

#

6G'9B \*\$-\$) '\$  
6G'9B \*%\$\$!\*&  
6G'9B \*%\$\$!\*(

GA 8

!%& "

%, !&\*\$

%)

ž

ž

ž

ž

# APD 43 C

Cummins  
Aksa  
D+&



5D8 (' 7 !'

f) !&+)

7

ž

ž

ž

ž

ž

ž

ž

	"	970
f) 7	"	2500
f) 7	"	1600