


# APD 43 C

Cummins  
Aksa D+&

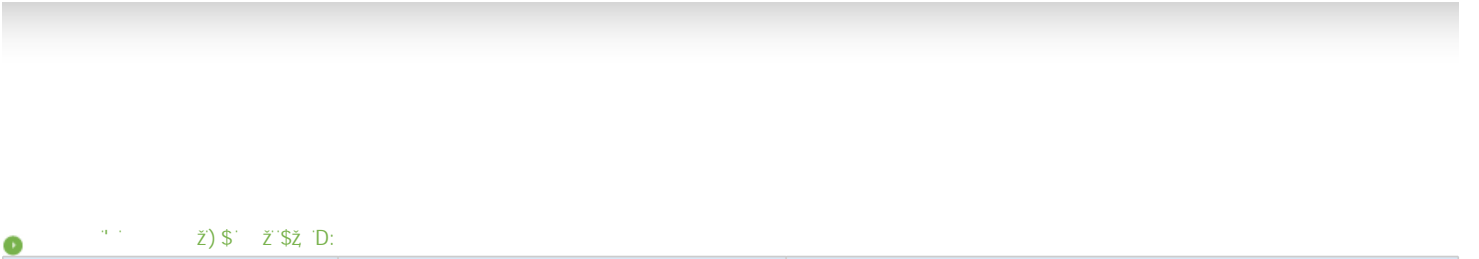

	43,00	34,40	39,00	31,20	Amp
400/230					56,00

Standard Specifications

1. Voltage: 400/230V, 50Hz

2. Power Factor: 0.8

3. Efficiency: 85%

4. Fuel Consumption: 2.5 L/hour

5. Noise Level: 65 dB

1. Voltage: 400/230V, 50Hz

2. Power Factor: 0.8

3. Efficiency: 85%

4. Fuel Consumption: 2.5 L/hour

5. Noise Level: 65 dB

1. Voltage: 400/230V, 50Hz

2. Power Factor: 0.8

3. Efficiency: 85%

4. Fuel Consumption: 2.5 L/hour

5. Noise Level: 65 dB

6. Transfer Switch: 150A

1. Voltage: 400/230V, 50Hz

2. Power Factor: 0.8

3. Efficiency: 85%

4. Fuel Consumption: 2.5 L/hour

5. Noise Level: 65 dB

6. Transfer Switch: 150A

# APD 43 C

Cummins  
Aksa  
D+&



Manufacturer		Cummins
Model		4BT3,9-G2
		∅ \$ \$ " # "
		( \$ " Q (<DQ
	L	3,90
	"	102 x 120
		16,5:1
	fl # ı	"# " 1500
	fl ı	L 11,00
	L	19,00
AbsorbedAirDischargeReSourceKey.Text	' # "	2,60
	' # "	120
	' # "	6,06
		24 V d.c.
	Load	%"\$ \$ı
	# "	
		9,30

		Aksa
		AK232
	Hz	50
	"	40
7cg		0,80
		3
	fl ı	400/230
	A	58


		fl ı		fl ı	
	"	"	"	"	L
APD 43 C	860	1860	900	1400	145
		fl ı		fl ı	
	"	"	"	"	L
APD 43 C	1240	2500	970	1600	

# APD 43 C

Cummins  
Aksa D+&''



## 1 D'+&''

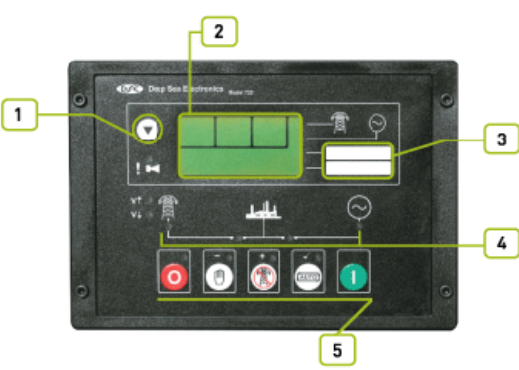

- 1
- 2
- 3
- 4
- 5

## 2

8G9ž +&\$ž ) 5ž&&\$#(\$

## 3

## 4

## 5

8G9'+&\$

8G9'+&\$

fl

8G9'+&\$

ž

fl

ž

ž

fl

%\$\$

ž

#

ž

ž

ž

ž

"

# APD 43 C

Cummins  
Aksa  
D+&''



f@Bt  
f@%&@t  
f@z@Bt

#

#

6G'9B \*\$-\$) \$  
6G'9B \*%\$\$!\*!&  
6G'9B \*%\$\$!\*!(

GA 8

%, !&\* \$

%)

ž

ž

!%&

"

ž

ž

"

# APD 43 C

Cummins  
Aksa  
D+&



5D8 (171)

1

!&+) 7 ž ž

2

ž ž ž ž

	"	970
f1 7	"	2500
f1 7	"	1600