

AD 220

Engine : Doosan
 Alternator : Mecc Alte
 Control System : P 732 control system



ISO8528

This generator set has been designed to meet ISO 8528 regulation.

SZUTEST

This generator set is manufactured in facilities certified to ISO 9001.



This generator set is available with CE certification.

2000/14/EC

Enclosed product is tested EU noise legislation 2000/14/EC

3 Phase Ratings, 50 Hz, PF 0,8

| Voltage | Standby Rating (ESP) | | Prime Rating (PRP) | | |
|---------|----------------------|--------|--------------------|--------|--------|
| | kVA | kW | kVA | kW | Amp |
| 400/230 | 220,00 | 176,00 | 200,00 | 160,00 | 288,00 |

Standby Rating (ESP): Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. ESP is in accordance with ISO 8528. Overload is not allowed.

Prime Rating (PRP): Applicable for supplying power to varying electrical load for unlimited hours. PRP is in accordance with ISO 8528. 10 % overload capability is available for a period of 1 hour within 12-hour period of operation, in accordance with ISO 3046.

STANDARD SPECIFICATIONS

- Water cooled, Diesel engine
- Radiator with mechanical fan
- Protective grille for fan and rotating parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine jacket cooling heater
- Base frame design incorporates an integral fuel tank and anti-vibration isolators
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel belows supplied separately
- Static battery charger
- Manual for use and installation.

OPTIONAL EQUIPMENTS

ENGINE

- Oil heater

ALTERNATOR

- Anti-Condensation Heater
- Over sized alternator
- PMG excitation + AVR
- Main line circuit breaker

CONTROL SYSTEM

- Transition synchronization with mains
- Remote annunciator panel
- Remote relay output
- Alarm output relays
- Remote communication with modem
- Earth fault, single set
- Charge Ammeter

OTHER ACCESSORIES

- Automatic or manual fuel filling system
- Manual oil drain pump
- Low and high fuel level alarm
- Residential silencer
- Enclosure: weater protective or sound attenuated
- Duct adapter (on radiator)
- Inlet and outlet motorised louvers
- Inlet and outlet acoustic baffles
- Trailer
- Tool kit for maintenance
- 1500/3000 hours maintenance kit
- Double wall chassis
- Main Fuel Tank

TRANSFER SWITCH

-
- Four Pole Contactor
-

AD 220

Engine : Doosan
 Alternator : Mecc Alte
 Control System : P 732 control system

DIESEL ENGINE SPECIFICATIONS

| | | | | |
|----------------------------|----------------------|--------------------------------|-------|-------|
| Manufacturer | | Doosan | | |
| Model | | P086TI | | |
| No. of Cylinders and Build | | 6 Cylinder, In Line | | |
| Aspiration and Cooling | | Turbo Charged and After Cooled | | |
| Maximum Standby Power | | 1500 rpm | | |
| | | 199 kW[266HP] | | |
| Total Displacement | L | 8,07 | | |
| Bore and Stroke | mm | 111X139 | | |
| Compression Ratio | | 16,4:1 | | |
| Rated Speed (rpm) | rpm | 1500 | | |
| Governor | | Electronic | | |
| Oil Capacity | L | 16,00 | | |
| Coolant Capacity | L | 49,00 | | |
| Intake Air Flow | m ³ /min. | 12,10 | | |
| Radiator Cooling Air | m ³ /min. | 250 | | |
| Exhaust Gas Flow | m ³ /min. | 34,00 | | |
| Exhaust Gas Temperatures | ° C | 580 | | |
| Start System | | 24 V d.c. | | |
| Fuel Consumption | Load | %100 | %75 | %50 |
| | L/h | 43,10 | 31,70 | 21,10 |

ALTERNATOR SPECIFICATIONS

| | | |
|-------------------|-----|--------------------------------------|
| Make | | Mecc Alte |
| Model | | ECO 38 2SN/4 |
| Frequency | Hz | 50 |
| Power | kVA | 200 |
| Design | | Brushless, 4 poles |
| Cos Phi | | 0,80 |
| Phase | | 3 |
| Voltage | V | 400/230 |
| Current | A | 288 |
| Insulation Class | | H |
| Temperatur | | H |
| Stator | | 2 / 3 steps |
| Rotor | | Single Bearing System, Flexible Disc |
| Excitation System | | Electronic (AVR) |


DIEMENSIONS AND WEIGHT

| Open Type | Dry Weight | Lenght | Width | Height | Tank Capacity |
|-----------------------|------------|--------|-------|--------|---------------|
| | kg. | mm. | mm. | mm. | L |
| AD 220 | 1850 | 2680 | 1150 | 1630 | 380 |
| Sound Attenuated Type | Dry Weight | Lenght | Width | Height | Tank Capacity |
| | kg. | mm. | mm. | mm. | L |
| AK 50 | 2350 | 3400 | 1210 | 1850 | 380 |

AD 220

Engine : Doosan
 Alternator : Mecc Alte
 Control System : P 732 control system

1 P 732 control system - Control System

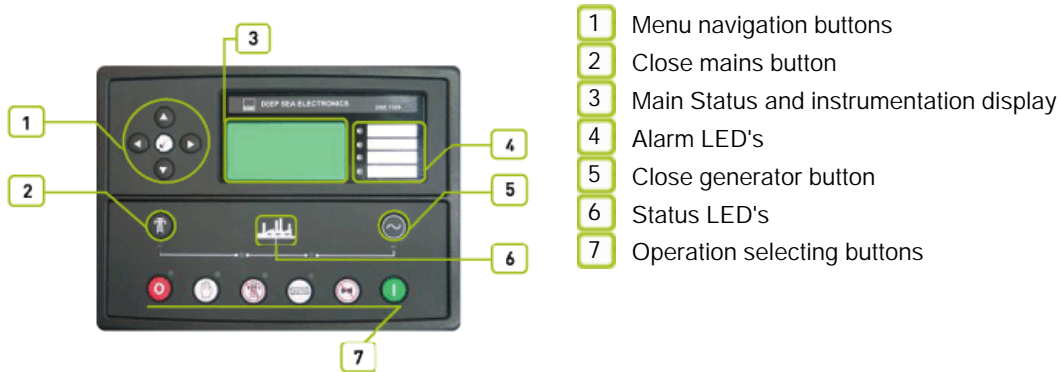

2 Devices

DSE, model 7320 Auto Mains Failure control module
 Static battery charger 5A, 220/240 volt
 Emergency stop push button and fuses for control circuits

3 Construction and Finish

Components installed in sheet steel enclosure. Phosphate chemical, pre-coating of steel provides corrosion resistant surface
 Polyester composite powder topcoat forms high gloss and extremely durable finish
 Lockable hinged panel door provides for easy component access

4 Installation

Control panel is mounted generating set baseframe on robust steel stand or power module.
 Located at side of generating set with properly panel visibility.

5 Generating Set Control Unit

Standard Specifications

Microprocessor controlled

132 x 64 pixel LCD display makes information easy to read

Front panel programming and also via PC software

Soft touch membrane keypad and five key menu navigation

Remote communications via RS232, RS485 and ethernet and SMS messaging

Event logging (50) showing date and time

Multiple date and time engine exercise mode and maintenance scheduler

AD 220

Engine : Doosan
 Alternator : Mecc Alte
 Control System : P 732 control system

Instruments

- ENGINE
- Engine speed
- Oil pressure
- Coolant temperature
- Run time
- Battery volts
- Engine maintenance due
- GENERATOR
- Voltage (L-L, L-N)
- Current (L1-L2-L3)
- Frequency
- Earth current
- kW
- Pf
- kVAr
- kWh, kVAh, kVArh
- Phase sequence
- MAINS
- Voltage (L-L, L-N)
- Frequency

Protection Circuits

- WARNING
- Charge failure
- Battery under voltage
- Fail to stop
- Low fuel level (opt.)
- kW over load
- Negative phase sequence
- PRE-ALARMS
- Low oil pressure
- High engine temperature
- Low engine temperature
- Over /Under speed
- Under/over generator frequency
- Under/over generator voltage
- ECU warning
- SHUT DOWNS
- Fail to start
- Emergency stop
- Low oil pressure
- High engine temperature
- Low coolant level
- Over /Under speed
- Under/over generator frequency
- Under/over generator voltage
- Oil pressure sensor open
- Phase rotation
- ELECTRICAL TRIP
- Earth fault
- kW over load
- Generator over current
- Negative phase sequence

Options

- High oil temperature shut down
- Low fuel level shut down
- Low fuel level alarm
- High fuel level alarm
- EXPANSION MODULES
- Editional LED module (2548)
- Expension relay module (2157)
- Expansion input module (2130)

Standards

- Electrical Safety / EMC compatibility
- BS EN 60950 Electrical business equipment
- BS EN 61000-6-2 EMC immunity standard
- BS EN 61000-6-4 EMC emission standard


Static Battery Charger

6UHfYfmVUf[Yf]g'a Ubi ZUM fYX'k Jh'gk JhX]b[!a cXY'UbX'GA 8 fVWbc'c[mUbX'ih\Ug\][\ YZZM]bVWf
 6UHfYfmVUf[Yf'a cXY'gfci hdi hJ !=VUfUUVf]gh]W]g] YfmVcgy'hc'gei UfY'UbX'ci hdi h]g) Ua dYfz&('j c'h87""-bdi h% , !
 &*\$j c'h57""'(& (\$) \Ug z `mci hdi hg\chVfVW]hdfchVW]cb UbX'ihVWb'VY i gYX'Ug'U'W ffYbhgci fVW"
 & (\$) VUf[Yf\Ug\][\ YZZM]bVWf]cb["]ZY'ck'Z]i fY'fUfYz"[\hk Y][\hUbX'ck \YUhfUX]UfYX']b UVMcfXUbW'k Jh'"]bYUf
 U'fYfbUf]j Yg"
 H\Y VUf[Yf]g]Z]hYX'k Jh' U'dfchVW]cb X]cXY'UMf'cggh'Y'ci hdi H'7'Uf[Y'Z]']ci hdi h]g'Uj U]UV'Y""7 cbbYVWUf[Y'Z]']fY'Um
 Vc'] VYf'k YYb'dcg]h]j Y'ci hdi hUbX'7: 'ci hdi H'

AD 220

Engine : Doosan
 Alternator : Mecc Alte
 Control System : P 732 control system

AK 50 - Canopy

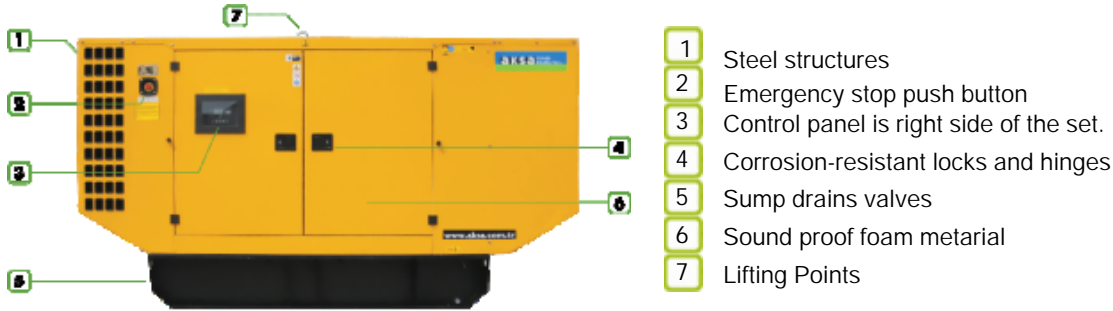

Introduction

Sound-attenuated and Weather-protective Enclosures Sound-attenuated and weather protective enclosures for generating sets from Aksa, meet event the sound requirements and provide optimum protection from inclement weather and development by our specialist acoustic engineers. Our modular designed sound insulated canopies (10- 300kVA) provide ease of access for servicing and general maintenance and interchangeable components permitting on-site repair. Enclosures are designed to optimize genset cooling performance, providing you with confidence that genset ratings and ambient capability.

Standard Specifications

- Compact footprint, low profile design.
- Enclosure, generator set, exhaust system and fuel tank are pre-ssembled, pre-integrated and shipped as one package
- Body made from steel components treated with polyester powder coating
- Fire retardant foam insulation
- Easy access to all service points
- Exhaust system inside canopy
- Large doors on each side
- Control panel viewing window in a lockable access door
- Emergency stop push button mounted on enclosure exterior
- Cooling fan and battery charging alternator fully guarded
- Fuel fill and battery can only be reached via lockable access doors.
- Lifting points on the top of canopy and base frame
- Customer options available to meet your applications needs.
- Aksa makes its generating sets' noise level tests in accordance with directive 2000/14/EC validation of the noise level test has been approved by the notified body Szutest

| | | |
|--------------------|-----|------|
| Width | mm. | 1210 |
| Lenght | mm. | 3400 |
| Height | mm. | 1850 |
| Fuel Tank Capacity | | 380 |